





REV.	DESCRIPTION	DATE
A		
B		09-2006

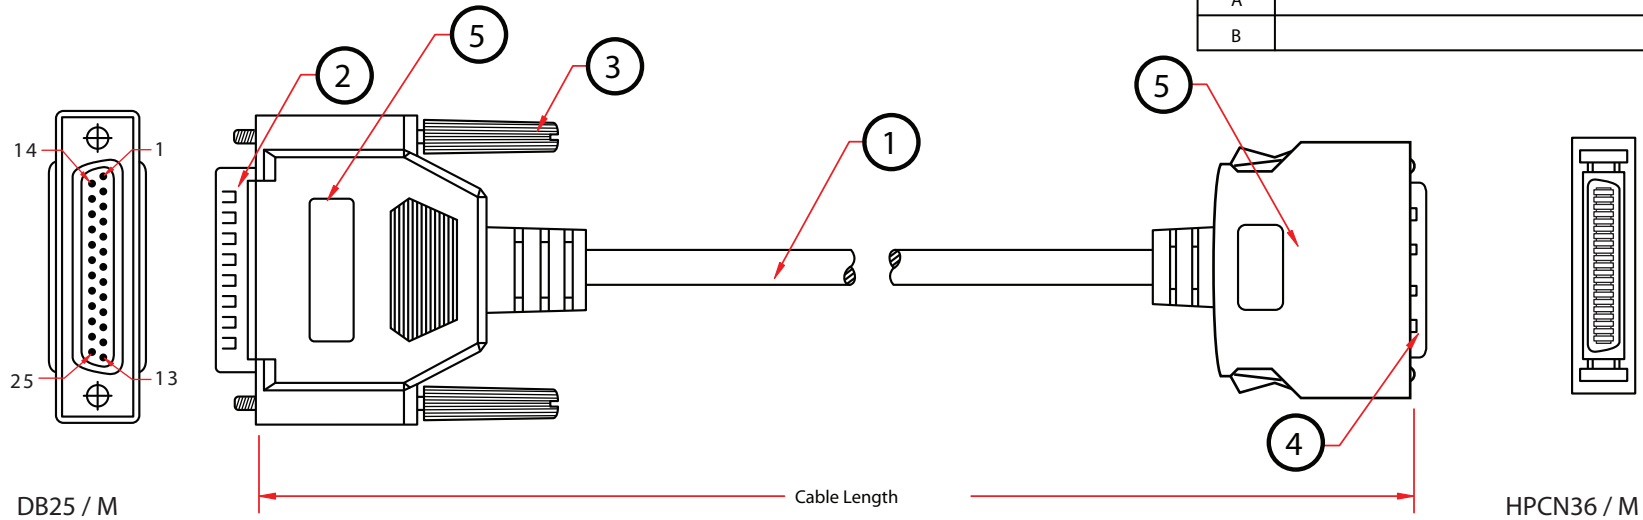

Pin Assignment			
DB25 / M	HPCN36 / M	DB25 / M	HPCN36 / M
11	1	6	10
23	19	21	28
13	2	7	11
	20		29
10	3	8	12
24	21	22	30
15	4	9	13
	22		31
12	5	16	14
	23		32
2	6	1	15
19	24	18	33
3	7	17	16
	25	25	34
4	8	14	17
20	26		35
5	9		18 — NC
	27		36 — NC
		Shield	Shield

PART NO.	CABLE LENGTH
10E2-02103	3 ft
10E2-02106	6 ft
10E2-02110	10 ft

5	Beige Molded PVD Hood, Fully Shielded w/AL-Foil
4	HPCN36 Male w/Gold Plating Contacts
3	4/40 Molded Thumbscrew, Beige
2	DB25 Male w/Gold Plating Contacts
1	IEEE-1284 18 Pair (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Double Shield w/AL-Foil, OD: 8.0mm, Beige Outer PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10E2-021xx			DRAWER	MPD
TITLE	DB25 Male / HPCN36 Male IEEE-1284 Printer Cable			CHECKED	MAC
				APPROVED	MAC
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com	